

Illesztőszeg



menetes

DIN EN ISO 8735, Typ A szerint
 (korábban DIN 7979)

Cikkszám: **ST2**

Keménység: 60 ± 2 HRC

Rendelési példa: ST2 – $d_1 \times l$

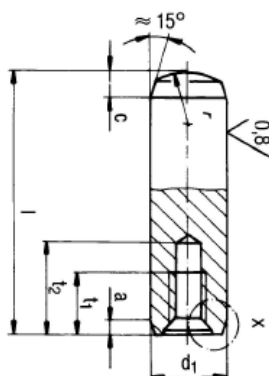

d ₁ m 6	4	5	6	8	10	12	13	14	16	20
r	4	5	6	8	10	12	13	14	16	20
d ₂	M 3	M 3	M 4	M 5	M 6	M 6	M 6	M 8	M 8	M 10
d ₃	3,3	3,3	4,3	5,3	6,4	6,4	6,4	8,4	8,4	10,5
t ₁	4,5-6	4,5-6	6	8	10	10	12	12	12	16
t ₂ min.	7-10	7-10	10	12	16	16	18	20	20	25
t ₃	0,8	0,8	1	1,2	1,2	1,2	1,2	1,2	1,5	1,5
a	0,4	0,5	0,8	1	1,2	1,6	1,8	1,8	2	2,5
C	1,3	1,7	2,1	2,6	3	3,8	3,8	4	4,6	6
hossz l js 15										
8		x								
10	x	x								
12	x	x	x							
14	x	x	x							
16	x	x	x	x						
18	x	x	x	x						
20	x	x	x	x	x	x				
24	x	x	x	x	x	x				
28	x	x	x	x	x	x		x	x	
32	x	x	x	x	x	x	x	x	x	x
36	x	x	x	x	x	x		x	x	x
40	x	x	x	x	x	x	x	x	x	x
45		x	x	x	x	x		x	x	x
50	x	x	x	x	x	x	x	x	x	x
55		x	x	x	x	x		x	x	x
60		x	x	x	x	x	x	x	x	x
70		x	x	x	x	x	x	x	x	x
80			x	x	x	x	x	x	x	x
90			x	x	x	x		x	x	x
100			x	x	x	x	x	x	x	x
120				x	x	x	x	x	x	x
Csomagolási egység: (db)	50	50	50	25	25	25	25	10	10	10